

RIG INSTRUCTIONS:

- Lay the head out on the ground about where you want the centre to be.
- Insert the first 2 legs into the lower part of the head, then the next 2 into the upper part
- Insert all 4 detent pins from the outside in,
- *NOTE—all pins must be in prior to moving rig as legs can slip out.
- Lift rig into standing position
- DO NOT insert all the legs while laying on the ground, only the first 4, then stand upright
- Be sure to have the pins from outside in, as gravity helps keep them in



- Run the rope through the pulley, across and through to the outer pulley, and down the leg
- Attach your apparatus if you like at this point.
- Lift one side of the rig only so it tilts over, and insert 2 more of the legs into the first set.
- Be sure to add the pins again.



- Now lift rig from second side, and insert the next set of 2 legs and pins
- Each time the rig is lifted from one side, it will balance quite well, you can hold one side only while another person inserts the leg on the adjacent side
- Leave the base leg sections (the one's that have the cleat and feet attached) till last
- Insert the 4 rubber feet into the bottom of the base legs (does not need to be tight, just screw in lightly, then insert.
- Once the rig is up to the height you require, and the base legs have been inserted, move each leg around until it's in the position you want
- For greater stability, the legs should pushed out softly away from the rig, do not force out, just out to where they sit naturally



- If on soft ground, like grass, use the pegs supplied to peg each of the 4 feet to the ground
- If pegs cannot be used (indoors, cement etc), run the chain (if supplied) around the base, making a square from each leg
- The chain is only required for full sized rigs at full height, a 3/4 height rig or mini does not require a chain around the base. Please note though, in a public area or some venues, a chain will be required for insurance reasons.

FULL SIZE RIG, SET UP
TO 3/4 HEIGHT



TIP AND TRICKS

- If you have a spare person, they can use the rope to assist with lifting. When one side is lifted by the legs, pull the rope from the opposite side
- 1 person can erect the rig up to 2 or 3 sets of legs, but 2 people is easier. 2 people minimum to insert the 4th set of legs, 3 is better, it does get quite heavy on the last set of legs.
- If you have a wider head section, greater than 900mm, the rig does have a twist effect making it harder to erect, we recommend at least 3 people minimum to erect to full height




WITH ONE LEG OUT, THE RIG
WILL BALANCE QUITE WELL

IF YOU WANT TO GET THE
ROPE ALL THE WAY UP OUT
OF THE WAY, BE SURE TO
ATTACH A SAND BAG OR
OTHER WEIGHT, THE ROPE
DOES NOT COME DOWN EASILY
IF YOU CAN'T PULL IT!


- If you are having trouble with the legs sliding in, be sure to have the leg completely in line. It will not go in if the other end is not aligned

These have to be in a straight line

- A small amount of beeswax, dry lube, silicone spray or similar may assist if you still find it a little difficult.

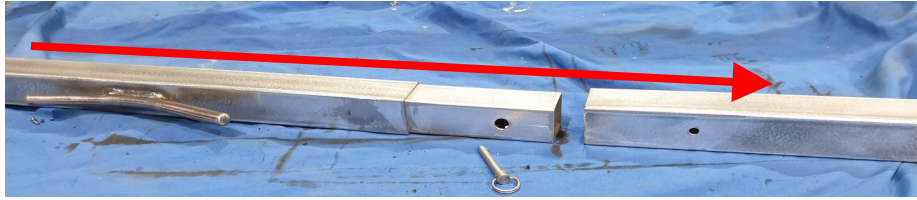

- Over time, if the rig has been down for a while, some small amounts of oxidization may form on the sleeves making it harder to erect. If this is so, just clean the ends with a small file or sand paper to remove any build up on the inside.
- **If the legs require excessive force, or are extremely hard to insert, please contact us immediately! Forcing the leg too much can make them become stuck in, or cause damage to the insert.**

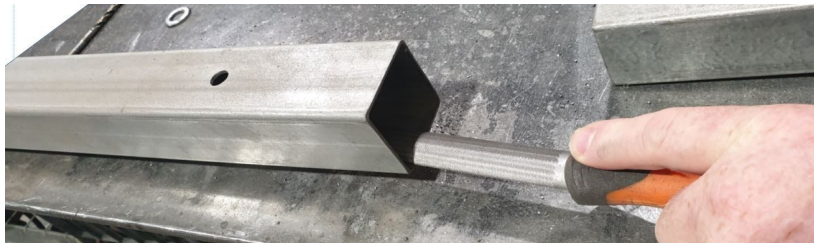

- The main climbing rope is a little susceptible to the elements, the sun in particular. If you are not using your rig for a while you can remove the rope and replace it later without having to dismantle the rig
- Take the small rope and tape it to the main rope with some tape. Don't tie a knot as it will more than likely get caught on the rig and won't feed correctly



BE SURE TO TAPE OVER
THE EDGES, OTHERWISE
IT MAY GET CAUGHT ON
THE PULLEY



WIDE HEAD SET UP FOR
TRAPEZE. (OLDER STYLE HEAD)



NEW STYLE HEAD, WITH TABS
INSTEAD OF EYELETS

ONE OF OUR
FIRST, 2016



MINI RIG WITH WIDE HEAD,
5 POINTS AND DUAL ROPE